

Nilfisk Industrial sweeper

Nilfisk SR 1900



2 metres wide sweeping path!



The Nilfisk SR 1900 represents a huge step forward in industrial class ride-on sweepers. With its extraordinary 2 metres wide sweeping path, the SR 1900 can sweep and clean large areas, such as parking lots, warehouses, factory floors and construction sites, in a fraction of the time it takes a conventional sweeper. Moreover it does this while efficiently controlling the dust, thanks to the innovative DustGuard™ misting system. Furthermore the SR 1900 is designed with attention to details such as better safety features, easier operator control, simple maintenance and function features that provide higher productivity and a lower total cost of cleaning.



SR 1900



The exclusive DustGuard™ system effectively controls airborne dust by providing a fine mist of moisture to the front and side brushes.



Operation of the SR 1900 could not be easier. One-Touch™ control shortens operator-training time and improves the cleaning result.

Technically superior and environmentally friendly

- The unique DustGuard™ feature with misting nozzles that spray a fine fog of moisture to the front and side brushes, effectively controls airborne dust for a cleaner environment.
- The main brush's 1.3 metre sweeping path is the widest in the industry, enabling better productivity through faster cleaning. Total cleaning width with side brushes is 2 metres.
- The strong polyethylene covers offer a high driving protection and even absorbing bumps up to 8 km/h. At the same time, they are fully recyclable in line with Nilfisk's environmental-awareness policy.
- The large-area operator compartment provides more comfort with less fatigue. One-Touch™ control and a clear view of the working zone give a better cleaning result with greater safety.



The SR 1900 incorporates superb high-dump capability up to 152 cm from ground level.



The large wheels give a smoother ride and allow the machine to mount kerbs without difficulty.




Exceptionally easy serviceability is achieved with Nilfisk's NoTools™ system. The 5-sided access to engine and hydraulic components saves time and keep down the service cost.

Serious cleaning demands a truly professional machine

Corrosion resistant hopper has extra-high dumping capability while the integrated bumper protects against machine damage.

UltraWeb™ dust filter captures even microscopic particles and is cleaned automatically. The long lasting pocket filter solution is also available.

The DustGuard™ dust suppression system includes an integrated 55-litre water tank to provide an effective misting as the brushes are activated.

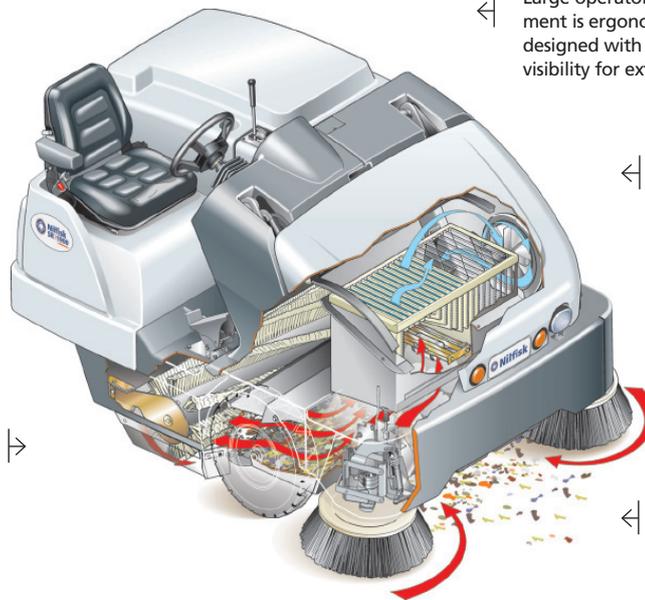

Large operator compartment is ergonomically designed with Clear-View™ visibility for extra safety.

Rust-free polyethylene covers provide excellent machine protection. They are easily removed without tools to simplify maintenance.

Available with 4-cylinder diesel, gas/LPG, or petrol engine power source.

1.3 metre main brush working width plus dual side brushes create an unprecedented 2-metre wide cleaning path.

Technical specifications

Description	Unit	SR 1900 D	SR 1900 LPG	SR 1900 P
Motor power source		Diesel, 4cyl. 26.5Kw/35.5Hp	Gas/LPG, 4cyl. 41.7Kw/56Hp	Petrol, 4cyl. 41.7Kw/56Hp
Motor brand		KubotaV1505D	PSI-GM Vortec 1600	PSI-GM Vortec 1600
Productivity rate theoretical/ actual	m ² /h	30,000/21,000	30,000/21,000	30,000/21,000
Working width with main broom	mm	1300	1300	1300
Working width with right side brush	mm	1650	1650	1650
Working width with 2 side brushes	mm	2000	2000	2000
Min. turn-around aisle width	cm	277	277	277
Max. speed	km/h	15	15	15
Hopper volume	l	400	400	400
Max. dumping height	cm	152	152	152
Main filter area	m ²	10	10	10
Length x width x height	cm	239x163x147	239x163x147	239x163x147
Weight	kg	1225	1225	1225

CE Specifications and details are subject to change without prior notice.



Nilfisk-Advance A/S
Sognevej 25
DK-2605 Brøndby
Denmark
Tel.: +45 43 23 81 00
Fax: +45 43 43 77 00
mail.com@nilfisk-advance.com
www.nilfisk.com